


High Efficiency

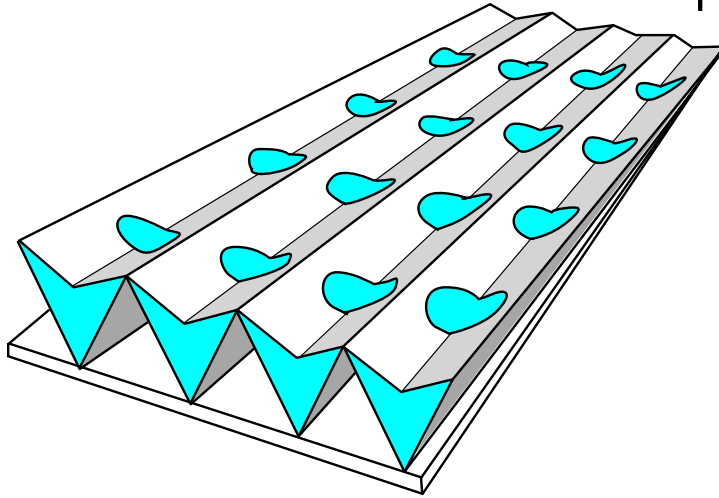

Enhanced efficiency thanks to an added final polyester layer

Holding capacity up to 20 kg/m² **

Filtration efficiency up to 99,21% **

Optimized using conditions :

Recommended air velocity : 0.25 – 1 M/S

Dépression à : 0.25 M/S ➤ 8 Pa
 0.5 M/S ➤ 21 Pa
 0.75 M/S ➤ 32 Pa
 1 M/S ➤ 42 Pa

Maximum recommended pressure drop : 128 Pa - possible up to 256 Pa

Height - area	75cm - 8m ²	90cm - 8m ²	100cm - 8m ²
BROWN 	AF721	AF921	AF121
WHITE 	AF723	AF923	AF123
FLAME RETARDANT 	AF722	AF922	AF122
Number of filters per pallet	56	56	56

** depending on paint used